

OFFICE OF THE MARION COUNTY SURVEYOR SECTION RECORD CORNER

70-10-08 SECTION 36 _TOWNSHIP **-11-30-98**-- 6-10-03

Wilcoxen PARTY CHIEF:

CREW


TYPE OF MARKER: Harrison METHOD OF ESTABLISHMENT:


IN. S.P.C. E ZONE NAD 83 17023602

NAME: 514563.3042(m) N:

E:

50070.9986(m)



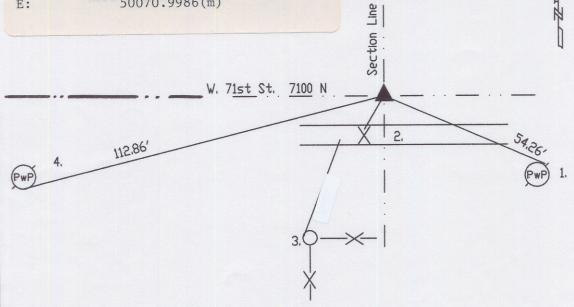

17023602 N Q corner

71st

×

5353

School

Lincoln Middle

entrance

CORNER HISTORY: Corner originally set as a post in 1821 by Wm. B. Laughlin with witness: 10" Hornbean N 60 E 18 links; 3" dogwood S 30 W 17 links per Marion County Atlas pg. 4. A survey 2-14&15-1853 by D. B. Hosbrook called witness 12" beech N 37 W 51 ½ links; 18" hickory N 26 E 38 links per Pike Township Legal Survey Book pg. 45. Reference dated 6-29-1955 by Unversaw called corner as a 1 $\frac{1}{2}$ " square brass plug. Reference dated 9-17-61 by G. Schmidt called same. Reference dated 10-2-62 by Stewart called a road nail brass plug. Reference dated 11-8-71 by Straber called brass plug. Reference dated 3-15-88 by Gries called same. Reference dated 8-14-90 by Wilcoxen called per new construction found a 1"x24" frost pin 8" down and set Harrison where the frost pin was. Reference dated 11-30-98 called Harrison. Reference dated 6-10-03 called Harrison. Reference dated 10-10-08 called Harrison.

3

5200

HC723602 DESCRIPTION REF. DISTANCE Road nail NE PwP#10-256 10'up 1. 54.26' 12.10' 2. Cut 'x' in curb 32.10 3. Cut 'x' collar of f.p. W side (distance from Cut 'x' in curb) Road nail S PwP#8-256 10"up 112.86' 4.